


REVISIONS				
NO.	DESCRIPTION	DATE	BY	
1	Was-B (Typo)	11/5/96	SDC	

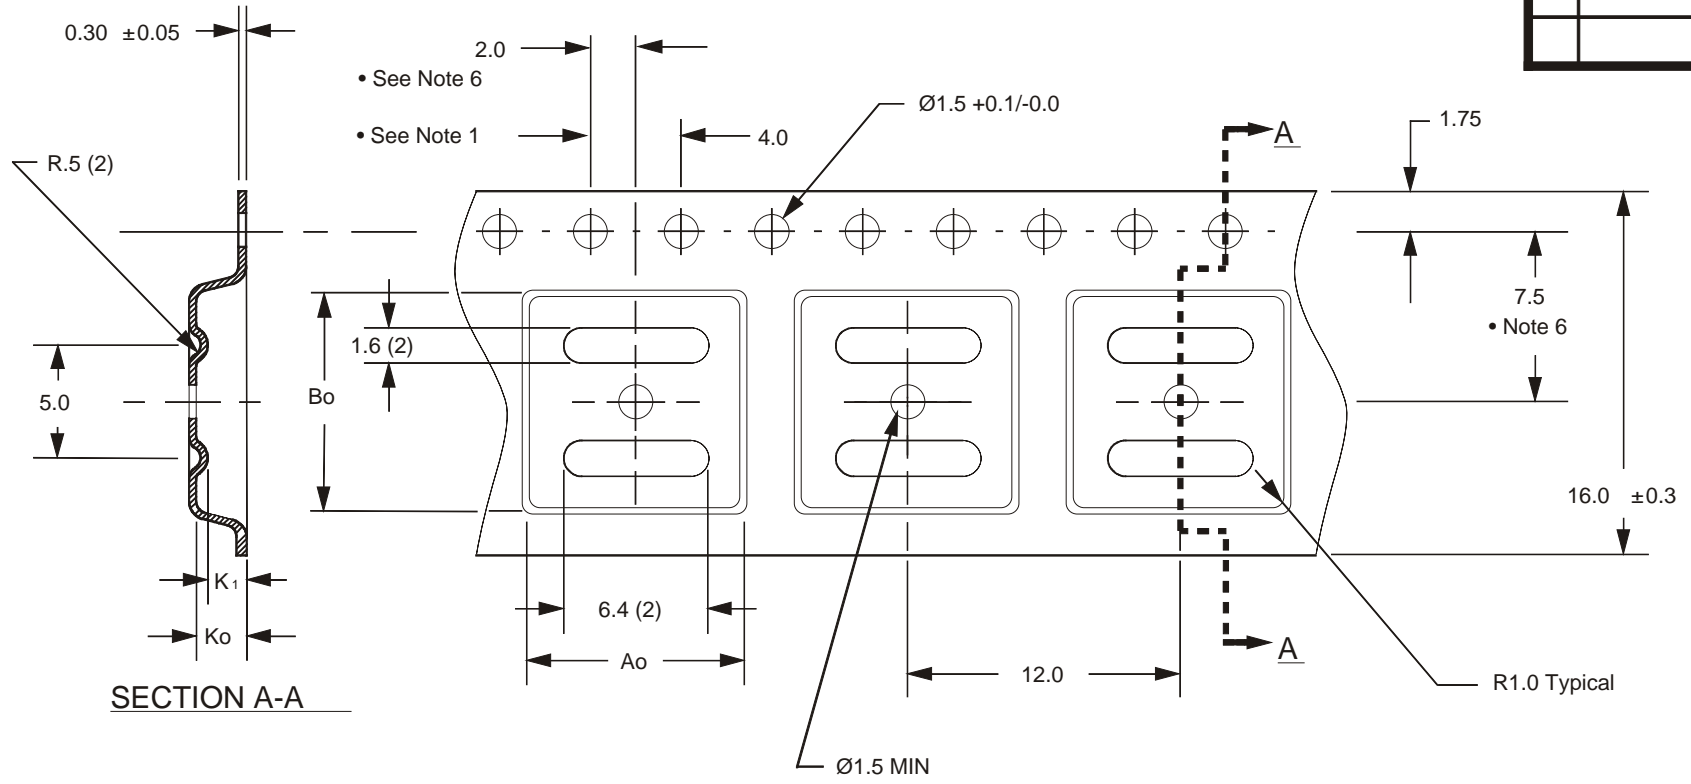

- Notes:
- 10 sprocket hole pitch cumulative tolerance ± 0.2
 - Camber not to exceed 1mm in 100mm
 - Material: Black Conductive Advantek Polystyrene
 - A_o and B_o measured on a plane 0.3mm above the bottom of the pocket
 - K_o measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
 - Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.

A_o = 9.3 mm
 B_o = 9.3 mm
 K_o = 1.8 mm
 K₁ = 1.2 mm

- All Dimensions in Millimeters -

TOLERANCES (EXCEPT AS NOTED)	Advantek Part Number Q07X07-C 1			
DECIMAL ± 0.1	QFP Carrier Tape			
FRACTIONAL	DRAWN BY RJB/SDC	SCALE 3 : 1	MATERIAL see Note 3	
ANGULAR	REFERENCE NO.	DATE 9/27/96	DRAWING NO. A1030-96-1	REV 1