


REVISIONS			
NO.	DESCRIPTION	DATE	BY

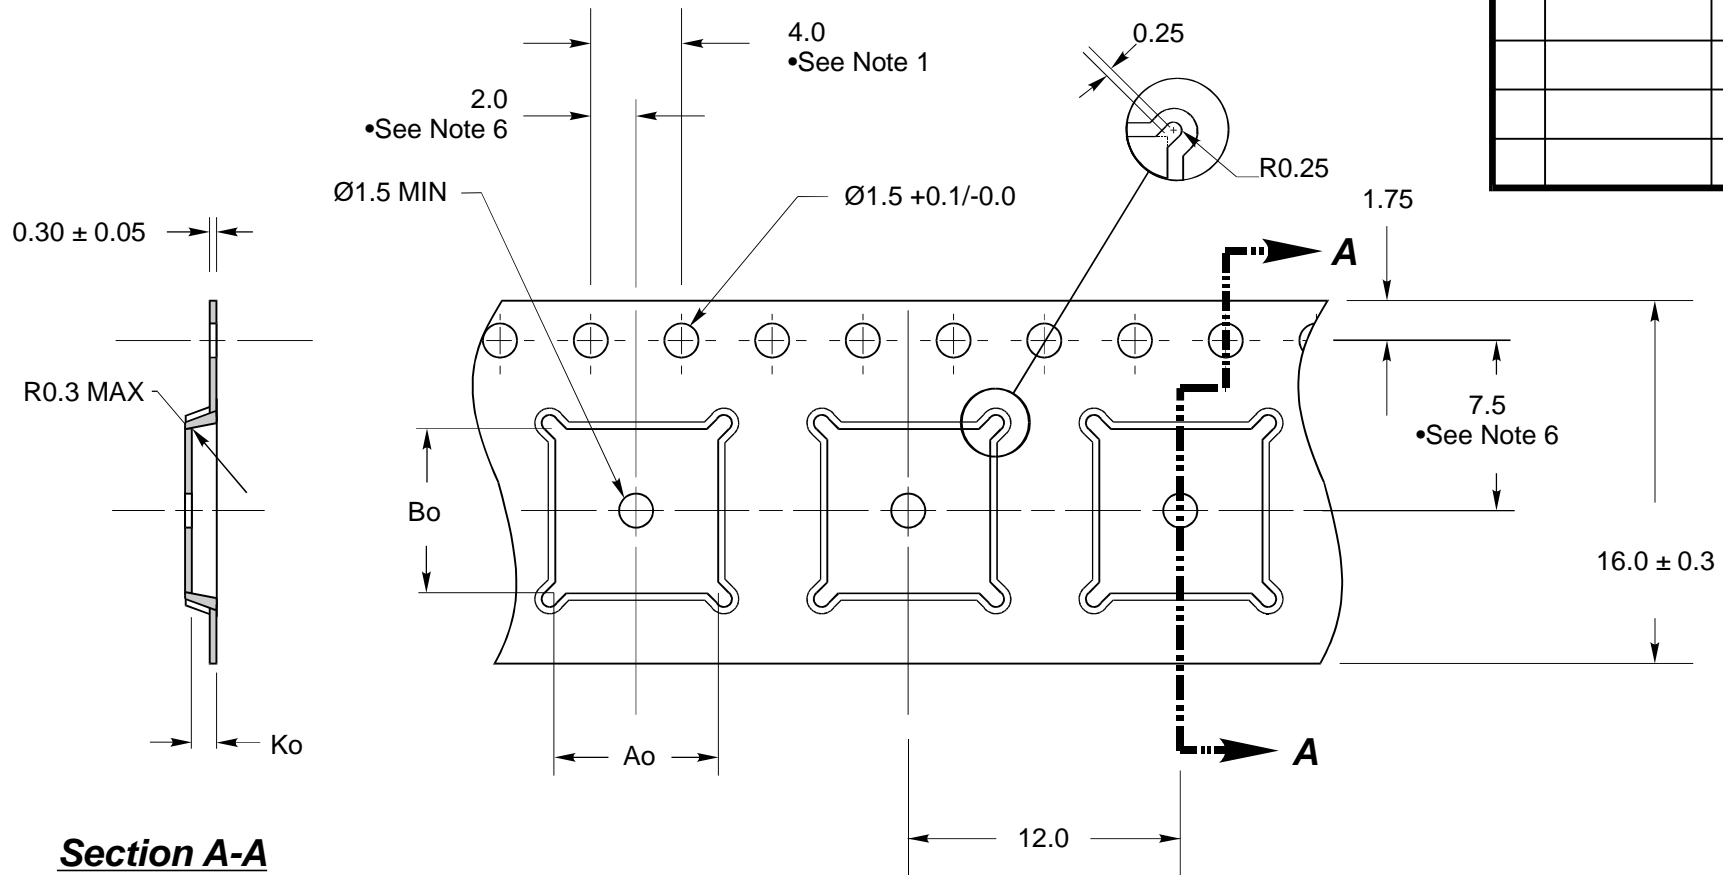

Section A-A

Ao = 7.25 mm
 Bo = 7.25 mm
 Ko = 1.1 mm

Notes:

1. 10 sprocket hole pitch cumulative tolerance ± 02 .
2. Camber not to exceed 1mm in 100mm.
3. Material: PS + C.
4. Ao and Bo measured as indicated.
5. Ko measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
6. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.

-All Dimensions in Millimeters-

TOLERANCES (EXCEPT AS NOTED)	Advantek Part Number ML0707-A Carrier Tape		
	ADVANTEK		
DECIMAL ± 0.1			
FRACTIONAL \pm	DRAWN BY TMO	SCALE 3:1	MATERIAL See Note 3
ANGULAR \pm	REFERENCE NO. T-9206	DATE 10/08/99	DRAWING NO. T102533AT
			REV