
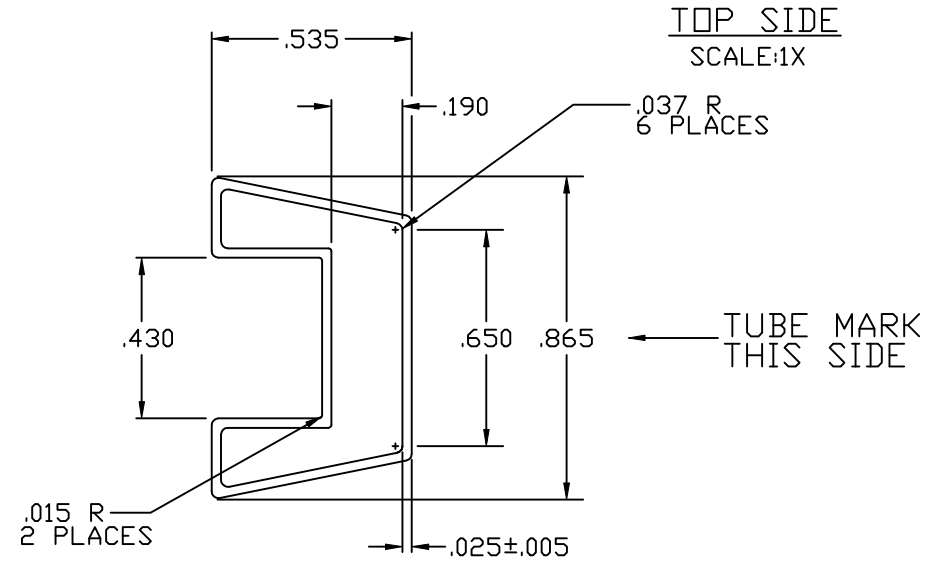


1. Material: Clear, transparent PVC.
2. This tube is to be tested per package material standards specs MIL-PRF-38535 and EIA-STD-5.
3. Finish: To be treated with anti-static coating; static charge on tube to be 50 Volts at a distance of 2.0 inches from a sensing probe.
4. No chips or cracks allowed.

5. .010" maximum burr on inner tube edge.
6. The flatness of tube saddle should be 0.005" max.
7. No oil, grease, or other foreign contamination to be on or in tube.
8. Surface Resistivity = $10^9 - 10^{11}$ ohm/sq.
9. Refer to MA-5016 for marking instructions.

ECN	DATE	APPD	DESCRIPTION	REV
			Added holes to eliminate the end plugs.	08
A-1838	12/14/00	CK	Add description for tube marking	09
A-1848	01/03/2001	CK	Correct typo on the location of pin hole. (from .250" to .220")	10

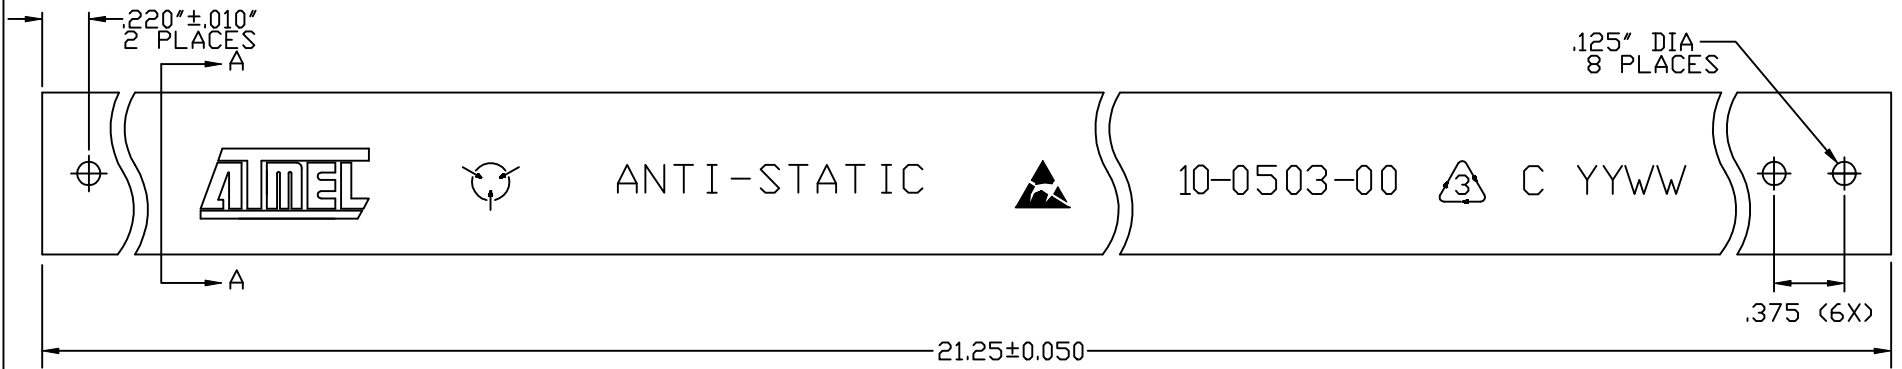

Where,
 C=Assembly location code (refer to MA-5019)
 10-0503-00 = Atmel part number
 YYWW=Tube manufacture code (optional)

SECTION "A-A"
SCALE:2X

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ARE: XX ± .010" XXX ± .010"		ATMEL ATMEL CORPORATION 2125 D'NEI DRIVE SAN JOSE, CA 95131	
DRAWN Rodel Gomez	DATE 01/03/2001	SHIPPING TUBE .600" WIDE DIP	
CHECKED Charlie Kung	DATE 01/03/2001	SIZE A	SCALE 1X
APPROVED Charlie kung	DATE 01/03/2001	DRAWING NUMBER 10-0503-00	